

Computer Science

Dynamic memory

Dynamic Memory Allocation



- Definition
- Memory map during program execution
- Dynamic memory allocation and release
- Dynamically allocated arrays
 - Unidimensional
 - Bidimensional
- Reallocation of memory blocks




Definition

- The compiler reserves memory for variables when they are declared, *before execution*
 - If global or static, in the data segment of the program
 - If local, in the stack
- The **dynamic memory allocation** is the assignment of memory space in ***execution time***.
 - The OS assigns the required memory from the available one in that moment
 - Very important tool when working with big multidimensional arrays to use memory efficiently

Memory map during program execution

- A program in execution is an *active process* that can use the memory assigned by OS:
 - Code segment
 - Program
 - Data segment
 - Global and static variables
 - Stack segment
 - Local variables
 - Return addresses in function calls
 - Free memory
 - **Dynamic allocation**

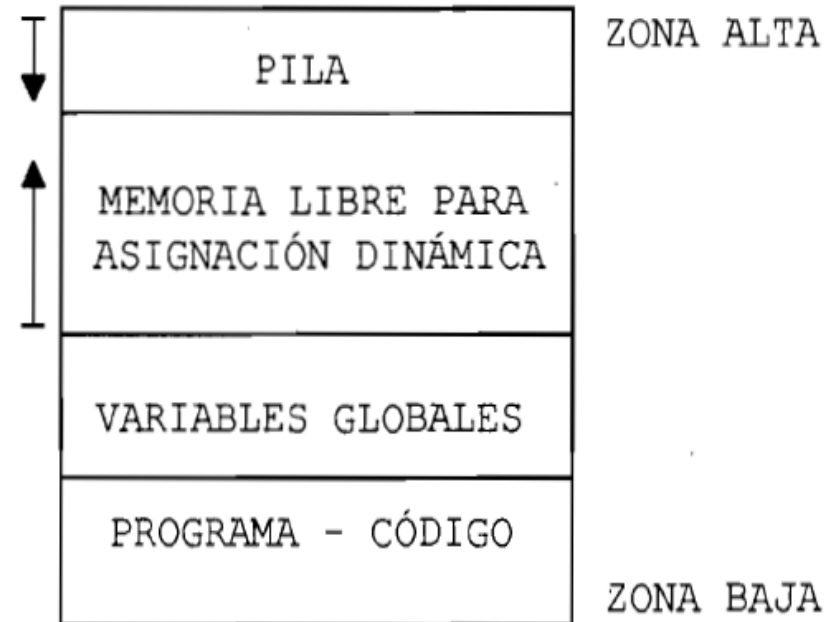

**UBICACIÓN EN MEMORIA
DE UN PROGRAMA EN C**

Dynamic memory allocation and release (I)

- The program can ask for memory to the OS during execution time with `malloc()` function

```
void *malloc(unsigned size);
```

- Declared in `stdlib.h`
- `size` indicates the number of requested bytes
- It returns a generic pointer to the first address of the assigned memory block (`NULL` if error)

Dynamic memory allocation and release (II)

- After use, memory must be released with **free ()** function

```
void free(void *pblock);
```

- Declared in `stdlib.h`
- `pblock` is the pointer to the block to be released
- The function does not return anything

Dynamic memory allocation and release (III)

- Example:

```
int *dat;  
dat = (int *)malloc(sizeof(int)); /*Assign*/  
if (dat==NULL)  
    printf("Allocation error");  
  
... /*Using dat*/  
  
free(dat); /*Release*/
```

Dynamically allocated arrays (I)

- Are the arrays whose size is fixed in execution time when they are allocated with `calloc()` function
- **Unidimensional dynamically allocated arrays**

```
void * calloc(numelements, elementsize);
```

- Declared in `stdlib.h`
- Returns a pointer to the first address of the assigned memory block (`NULL` if error)
- `numelements` indicates the number of elements in the array
- `elementsiz` indicates the size of each element

Dynamically allocated arrays (II)

- Example: Dynamic allocation of an array of N integers

```
int *arr10; // Pointer to int
arr10= (int *)calloc(N, sizeof(int)); //Assign
if (arr10==NULL)
    printf("Allocation error");


... // Using arr10

free(arr10); // Memory release
```

Dynamically allocated arrays (III)

- **Bidimensional dynamically allocated arrays:**
 1. Declare a ***pointer to pointer*** to the data type of the 2D-array
 2. Assign dynamically a 1D-array of pointers
 3. Assign dynamically a 1D-array of data to each of the pointers of the previous array of pointers
 4. Normal use of the 2D-array
 5. Release memory in inverse order:
 1. With a loop release every 1D-array of data
 2. Release the 1D-array of pointers

Dynamically allocated arrays (IV)

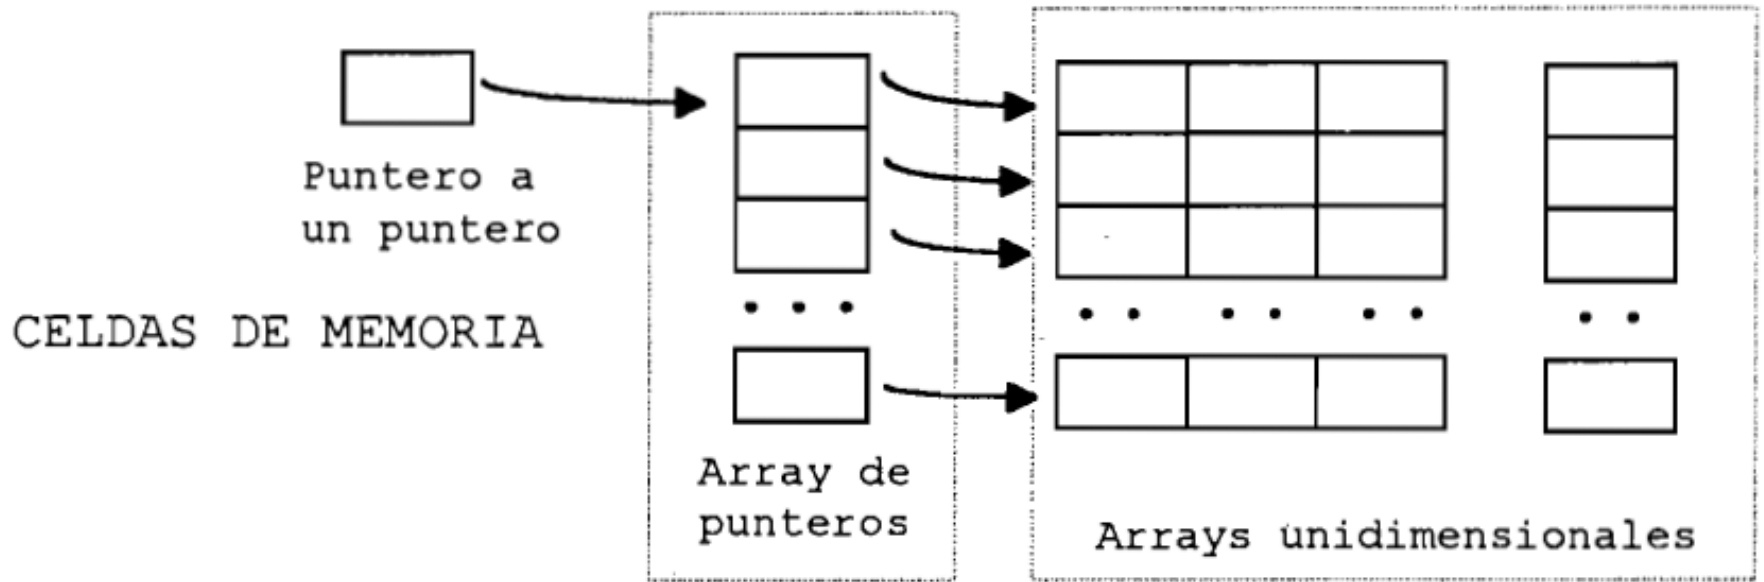

**ARRAY BIDIMENSIONAL CREADO MEDIANTE
ASIGNACIÓN DINÁMICA DE MEMORIA**

Dynamically allocated arrays (V)

- Example: 2D-array (NROW, NCOL) of real numbers

```
float **arr2D;           // Pointer to pointer to float
int i,j;

arr2D = (float **)calloc(NROW , sizeof(float *))
    //Assign mem for 1D-array of NROW pointers to float

for (i=0 ; i<NROW ; i++;)
    arr2D[i] = (float *)calloc(NCOL , sizeof(float));
    // Assign mem for each 1D-array of NCOL float numb

... // Use arr2D, elements can be accessed arr2D[i][j]

for (i=0 ; i<NROW ; i++) free(arr2D[i]);
    // Release the 1D-arrays of real data
free(arr2D);           // Release the 1D-array of pointers
```

Reallocation of memory blocks

- In execution it is possible to **change the size assigned to an array** by reallocating the memory block it occupies

```
void * realloc(void *ptoldblock, numbytes);
```

- Declared in `stdlib.h`
- Returns a pointer to the new memory block that might be different to the previous one (`NULL` if error)
- Data of the original block are not lost
- `ptoldblock` points to the original block to reallocate
- `numbytes` indicates the size in bytes of the new block